



R-2000 NET-ZERO ENERGY Pilot Case Study

CITYSCAPE COMMUNITY MATTAMY HOMES



Calgary, Alberta



Project DESCRIPTION

Natural Resources Canada (NRCan) spearheaded a national demonstration project to engage the residential industry in designing and building net-zero energy houses. The goal was to showcase industry leadership in realizing such an ambitious goal while delivering homes attractive to the marketplace.

NRCan established the energy performance framework that ensured consistent and transparent rating of the homes. The Pilot requirements were based on NRCan's R-2000 high performance home program, a well-established and premium housing program in Canada.

This project saw the construction of 26 net-zero energy or net-zero energy ready homes. A net-zero energy home is a house that produces as much energy as it consumes on an annual basis. Mattamy Home's first net-zero energy home opened its doors on November 25, 2015.

The **BUILDER:** **MATTAMY HOMES**



Opened their first R-2000 Net-Zero Energy Pilot home in Calgary



Selected as one of five builders in Canada to demonstrate net-zero energy construction in a production environment (NRCan/Owens Corning ecoEII)



Affordability

The Mattamy net-zero energy home costs about \$69,000 more than houses in the same location built to code. For the buyer, the home costs about 15% more than a comparable standard Mattamy single detached laneway home in Calgary.

Key **FEATURES**

EnerGuide Rating

0
GJ/Yr



Roof:

R-60 blown fibreglass



Main walls:

R-24 batt + R-22.5 XPS (4.5")




Basement:

walls: R-14 batt + R-25 XPS (5")
under slab: R-20 XPS (4")



Windows:

low-E, argon-filled, triple pane



HRV:

84% efficient at 0°C and 72% at -25°C



Airtightness:

0.82 ACH at 50 Pa



Space heating and cooling:

air source heat pump, 9.57 HSPF/17.8 SEER
+ air handler



Water heating:

2.78 EF heat pump water heater
43.5% efficient drain water heat recovery



Rated annual energy consumption:

39.12 GJ

This house consumes ~55% less energy than its reference house.




Electricity generation:

≤10 kW solar PV system, 40 panels 280 W each,
rated annual energy production: 54.18 GJ




Estimated net annual energy use:

-15.06 GJ

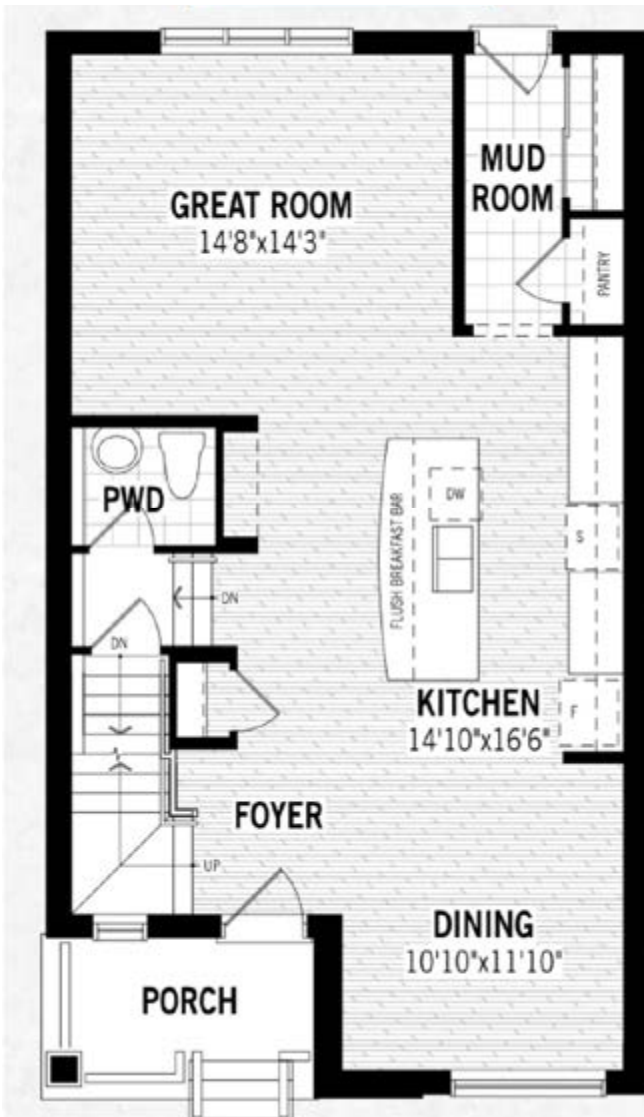

ground floor plan

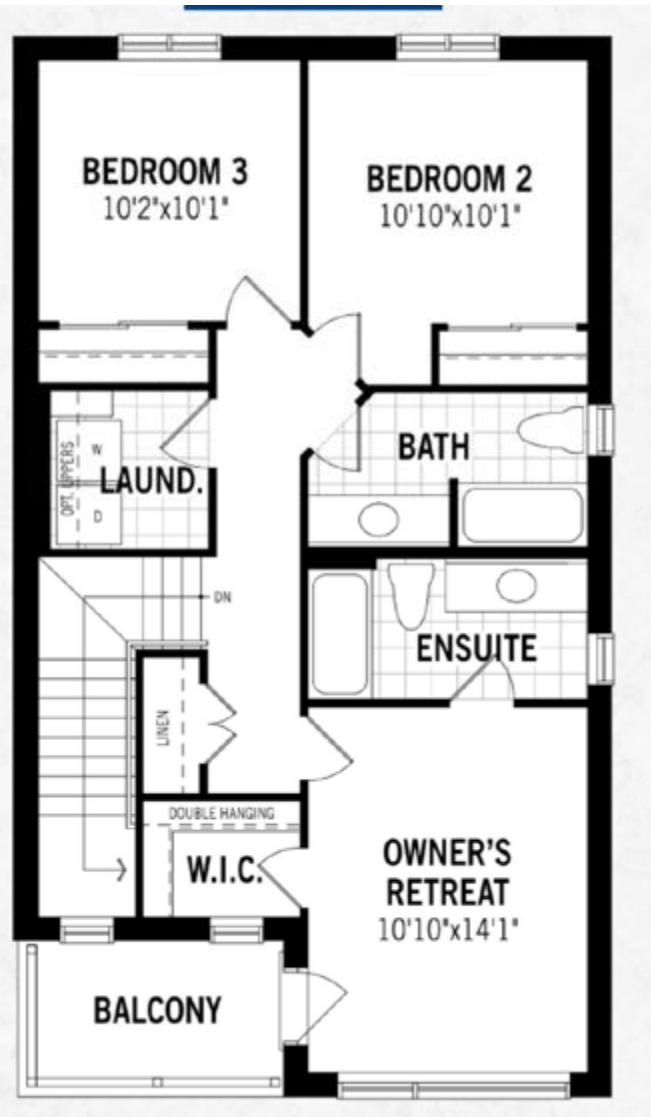

main floor plan



Technical SUMMARY

| Mattamy Homes, Calgary, Alberta | | |
|---------------------------------------------------------------------|------------------------------------|----------------------------------|
| Site characteristics | | |
| Location | Calgary, Alberta | |
| Site type | Suburban, new development | |
| Design conditions | | |
| Number of occupants | 2 adults, 1 child ¹ | |
| Heating degree days ² | 5,000 | |
| Building description | | |
| Type: Two-storey, 3 bedroom single detached residence | | |
| Floor area (including basement) | 208.67 m ² | |
| Heated volume | 543.80 m ³ | |
| Exposed floor area | 5.83 m ² | |
| Ceiling area | 71.49 m ² | |
| Main wall area | 175.62 m ² | |
| Total window area | 26.44 m ² | |
| Thermal characteristics | Effective | Nominal |
| Roof | 10.68 RSI | R-60 blown fibreglass |
| Walls: Main floor | 7.47 RSI | R-24 batt + R-22.5 XPS (4.5") |
| Basement | 7.26 RSI | R-14 batt + R-25 XPS (5") |
| Windows (average value) | 1.07 RSI | low-E, argon-filled, triple pane |
| Basement floor | 3.52 RSI | R-20 XPS (4") |
| Measured airtightness level | 0.82 air changes per hour at 50 Pa | |
| Building performance (annual energy consumption)³ | | |
| Space heating | 5.93 GJ | |
| Domestic water heating | 4.80 GJ | |
| Lighting, appliances and other plug loads | 25.62 GJ | |
| Mechanical ventilation | 1.67 GJ | |
| Space cooling | 1.10 GJ | |
| Rated annual energy consumption | 39.12 GJ | |
| Rated annual energy production⁴ | 54.18 GJ | |
| Net annual energy use (consumption minus production) | -15.06 GJ | |
| EnerGuide rating (ERS) | 0* GJ | |

1. Occupant assumptions based on EnerGuide Rating System Version 15.

2. Heating degree days data from the National Building Code.

3. Building performance is modelled using HOT2000 version 11.3.

4. The rated annual energy production accounts for the contribution of eligible energy-producing systems. These houses use only solar photovoltaics as their energy-producing system for electricity generation.

* This house has been designed to produce more energy than it consumes on an annual basis.

R-2000 standard pick list

Indoor Air Quality

IAQ 001 Reduced volatile organic compounds (VOC)

Coatings, sealants, adhesives, and wall and ceiling finishes

The following shall all have low-VOC content as determined through Green Seal, ECOLOGO or GREENGUARD Certification:

- ◆ All coatings, sealants and adhesives used in the interior of the house;
- ◆ All liquid coatings, i.e., paints and varnishes;
- ◆ All finish flooring adhesives;
- ◆ All wall and ceiling finishes (such as wallpaper, wall fabrics, stone and ceramic tile).

IAQ 002 Millwork, cabinetry and countertops

All millwork, including trim, casements, baseboards, wainscoting and built-in cabinets, shall have low content of VOCs as determined through ECOLOGO or GREENGUARD certification. Cabinets and vanities shall be made either from solid wood or manufactured wood products. If made from manufactured wood products, products shall meet either of the following criteria:

- ◆ must be made from urea formaldehyde-free fibre board or particleboard that meets the E-1 European standard or the HUD Standard, 24 CFR Part 3280.308; or
- ◆ must have all exposed surfaces sealed with a low-VOC sealer as determined through Green Seal, ECOLOGO or GREENGUARD certification.

IAQ 003 Flooring

Carpeting and carpet cushion

Except as noted, carpeting and carpet cushion used together in the house shall meet either of the following criteria:

- ◆ The carpet shall be labeled under the Canadian Carpet Institute's Green Label Plus Program, and the carpet cushion shall be labeled under the Carpet and Rug Institute's Green Label Plus Program.
- ◆ A non-Green Label carpet and/or non-Green Label Plus carpet cushion shall cover no more than 10 percent of the interior floor area including the basement floor area. Where carpeting is used in the basement, the basement slab shall be insulated with a minimum R-10, be heated, or have no direct contact between the carpet and concrete floor.

Solid surfaces

All solid flooring, such as bamboo, cork, laminate, resilient (sheet) stone, tile and wood, shall have low-VOC content as determined through ECOLOGO or GREENGUARD certification. Wood flooring shall be from a sustainable source, as determined through a third-party under the Programme for the Endorsement of Forest Certification (PEFC) International or the Forest Stewardship Council (FSC).

Note: Vinyl flooring shall not be used.

Underlayment

All particleboard-flooring underlayment shall meet either of the following criteria:

- ◆ E-1 European standard or the ANSI A208.1-1993 Table B standard
- ◆ have all surfaces sealed with a sealer with a low-VOC content as determined through ECOLOGO or GREENGUARD certification or be pre-finished

Flooring adhesives

All flooring adhesives shall all have low-VOC content as determined through Green Seal, ECOLOGO or GREENGUARD certification.

IAQ 005 Air filtration

Install a medium-efficiency air filter with a minimum MERV rating of 13 where air-circulating, heating or cooling systems are used. The HVAC designer will need to take the pressure drop of the MERV 13 filter into account when sizing the ducts.

Energy Efficiency

EE001 Energy-efficient appliances

An ENERGY STAR® certified clothes washer, dishwasher and refrigerator shall be included with the sale of the house.

EE002 Electricity monitoring and saving devices

Install a whole house home energy display unit that provides ongoing measurement and analysis of the home's energy consumption at the individual circuit level.

EE004 Reduced energy consumption of the house

Predicted energy consumption is at least 15% less than the R-2000 whole house energy target, as provided in Clause 5.1.2 of the R-2000 standard.

Environmental Stewardship

ES001 Reduced storm water discharge

Provide infrastructure to limit the peak storm water discharge rate to less than 1% of maximum annual rainfall intensity. This could be done by installing walkways and driveways that promote water absorption rather than run-off and/or water retention such as rainwater collection, a rainwater garden or a detention pond).

Water conservation

WC004 Irrigation Systems

Landscaping systems shall be designed to not require irrigation, be irrigated with rainwater or domestic reclaimed water (in accordance to CSA B128.1-06 Design and Installation of Non-Potable Water Systems) only, or be irrigated by the following type of system. Should potable water be required for irrigation, irrigation systems shall include a low-volume, non-spray irrigation system (drip irrigation, bubblers, drip emitters, soaker hose) and a zoned irrigation system separating turf and bedding areas.

Resource Management


RM002 Use of wood conserving technologies

Engineered floors used substantially (80% or more).

The PERFORMANCE



Energy consumption by usage

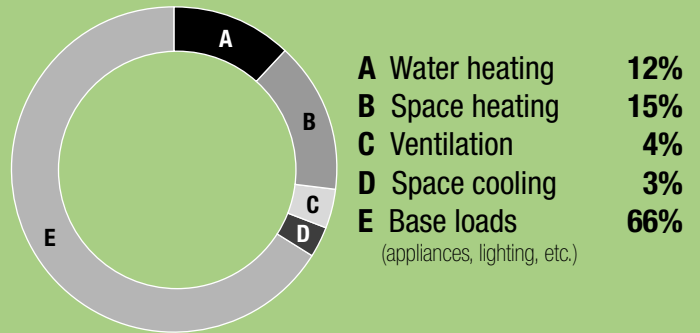

This case study was developed by buildABILITY Corporation for Natural Resources Canada's Office of Energy Efficiency, 2016.

Neither Natural Resources Canada nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of its contents. Reference in the case study to any specific commercial product, process, service or organization does not necessarily constitute or imply endorsement, recommendation or favouring by Natural Resources Canada. The views and opinions of authors expressed in this report do not necessarily state or reflect those of Natural Resources Canada.

Information contained in this publication or product may be reproduced, in part or in whole, and by any means, for personal or public non-commercial purposes, without charge or further permission, unless otherwise specified. You are asked to exercise due diligence in ensuring the accuracy of the materials reproduced; indicate the complete title of the materials reproduced and the name of the author organization; and indicate that the reproduction is a copy of an official work that is published by Natural Resources Canada and that the reproduction has not been produced in affiliation with, or with the endorsement of, Natural Resources Canada.

Commercial reproduction and distribution is prohibited except with written permission from Natural Resources Canada. For more information, contact Natural Resources Canada at nrcan.copyrightdroitdauteur.nrcan@canada.ca.

EnerGuide and HOT2000 are official marks of Natural Resources Canada.

The ENERGY STAR® mark is administered and promoted in Canada by Natural Resources Canada. Used with permission.

Cat. No. M134-57/2018E-PDF
ISBN 978-0-660-28177-3

© Her Majesty the Queen in Right of Canada, as represented by the Minister of Natural Resources, 2019